



Control Units

>> Overview - Actuators	page	12
- OKTRON series	page	20
- OKTRON-R series	page	40
- RX series	page	60
- QUARTRON series	page	76
- RONTRON-R-JUWEL series	page	98
- RONTRON-RJ-Exclusive series	page	120
- RONTRON-RJ-stainless steel series	page	124
- RONTRON-Q-JUWEL series	page	144
- RONTRON-QJ-Exclusive series	page	162
- SHORTRON series	page	166
- RX-JUWEL series	page	178
- RONDEX series	page	194
- RONDEX-M series	page	214
- DUX-Basic series	page	232
- QUARTEX-R series	page	256
- RVA stainless steel series	page	276
- KOMBITAST-R-JUWEL series	page	286
- OKTRON-JUWEL series	page	304
- QUARTRON-JUWEL series	page	320
- QUARTEX-R-JUWEL series	page	342
- Vandalism-proof actuators	page	358
- Emergency Stop Buttons	page	362
- Emergency Braking Switches	page	402
>> Overview - Contact Blocks	page	414
- electric contact blocks with PCB-mount terminals	page	486, 502, 518
- electric contact blocks with Faston terminals	page	416, 426, 434, 464, 494, 510, 518
- electric contact blocks with screw connections	page	476, 524, 530
- electric contact blocks with spring clamp connect.	page	540, 546
- battery-free wireless modules	page	570
- contact blocks for AS-Interface	page	558

>> Series Overview - Actuators



OKTRON
 Panel cut-out: Ø 16 mm Front dimensions: 25 x 25 mm page **20**



OKTRON-R
 Panel cut-out: Ø 16 mm Front dimensions: Ø 25 mm page **40**



RX
 Panel cut-out: Ø 16 mm Front dimensions: Ø 24 mm page **60**



QUARTRON
 Panel cut-out: Ø 16 mm Front dimensions: 25 x 25 mm page **76**



QUARTRON Mosaik
 Panel cut-out: Ø 16 mm Front dimensions: 24 x 24 mm page **76**



RONTRON-R-JUWEL
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **98**



RONTRON-RJ-Exclusive
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **120**



RONTRON-RJ-Edelstahl
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **124**



RONTRON-Q-JUWEL
 Panel cut-out: Ø 22 mm Front dimensions: 28 x 28 mm page **144**



RONTRON-QJ-Exclusive
 Panel cut-out: Ø 22 mm Front dimensions: 28 x 28 mm page **162**



SHORTRON
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **166**



RX-JUWEL
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **178**



RONDEX
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **194**



RONDEX-M
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **214**



DUX-Basic
 Panel cut-out: Ø 22 mm Front dimensions: Ø 30 mm page **232**



QUARTEX-R
 Panel cut-out: Ø 22 mm Front dimensions: 30 x 30 mm page **256**



RVA stainless steel
 Panel cut-out: Ø 22 mm Front dimensions: Ø 28 mm page **276**



KOMBITAST-R-JUWEL
 Panel cut-out: Ø 30,5 mm Front dimensions: Ø 36 mm page **286**



OKTRON-JUWEL
 Panel cut-out: 23 x 23 mm Front dimensions: 25 x 25 mm page **304**



QUARTRON-JUWEL
 Panel cut-out: 24 x 24 mm Front dimensions: 27 x 27 mm page **320**



QUARTEX-R-JUWEL
 Panel cut-out: 26 x 26 mm Front dimensions: 30 x 30 mm page **342**



Vandalism-proof Actuators
 page **358**



Emergency Stop Buttons
 page **362**



Emergency Braking Switch
 page **402**



Nameplates
 page **410**



Contact Blocks
 page **414**

>> Control Units

Uses & Applications

SCHLEGEL and DUX control units include a variety of complete pushbutton and switch series for front-panel mounting and partially also for base-plate mounting (supplied without coupling). The actuators are designed for exclusive applications as well as for use in harsh environments. They are housed in attractive, square, rectangular or round insulating bodies, allowing side-by-side assembly and thus full keyboard arrangements. Due to the flexible contact configurations and ease of assembly, the units can be used in every field of application.

Mounting of Actuators

First, the required mounting holes have to be drilled, punched or lasered (refer to the relative drilling pattern on the starting page of each series). For round cut-outs, keep in mind to provide a recess for the locating lug.

The actuators are then inserted into the cut-outs and fixed with a mounting nut on the rear.

Because the are almost completely recessed in the panel, the square Jewel actuator housings require a spacer to be put on from behind before securing them with the mounting nut.

Lenses and nameplates have to be ordered separately unless otherwise stated. This provides high flexibility to the combination of lens colours and inscriptions once the control units are mounted in the panel (see illustration under "Mounting and Service Instructions").

Mounting of Contact Blocks

The procedure for combining the contact blocks with the actuators depends on whether the units are front-panel or base-plate mounted. All SCHLEGEL contact blocks have rounded corners and edges and thus allow a comfortable use without risk of injury.

Front-panel mounting: The following instructions apply to all related 22 mm series: With the M...type series, first insert the contact modules into a module holder, then snap the module holder onto the actuator neck by a rotary motion (bayonet coupling). For side-by-side arrangements with the D... type series, snap the module holder onto the actuator neck first by a rotary motion, then insert the contact modules into the module holder. The contact blocks ETR.. (one-piece) do not need a module holder, so snap them directly onto the actuator. As to all related 16mm series, simply snap the contact blocks of the type series AT, BT, CT and PT onto the actuator neck (requires no module holder). A slight twist enables to snap them off again.

Base-plate mounting: Actuators of all related 22mm series are not firmly connected to the contact unit. A centring ring ensures a guided interaction of actuator and contact unit. For the modular contact elements a module holder, which is snapped onto the modules from behind, provides ease of assembly on any mounting plate or cabinet base plate.

The contact units of the type series CTP and CZ (suitable for PCB's) are first soldered onto the PCB, then put onto the actuator of the 16 mm series and fixed by a small locking bolt. This bolt can be moved with a screwdriver through a hole in the PCB.

Illumination

For the illumination of pushbuttons, selector or key switches and pilot lights either incandescent lamps, neon lamps or LED's can be used. The contact units are optionally available with BA9s, T5,5K or W2x4,6d sockets, depending on the particular type series.

Marking Options

With the importance of an efficient component marking in mind, the SCHLEGEL control units have been designed to accept a clearly visible marking, easy to produce and comprising a variety of symbols and inscriptions. Hence, a multitude of standard nameplates are available, but also customer-specific imprints are possible.

The nameplates are inserted under the lenses and are thus protected from wearing and soiling. Still today this is the best system which was originally a development of Georg Schlegel.

Other marking options offer the external markings using special nameplate holder. These nameplates can also be printed with the standard imprints or according to users' requirements.

Front Bezel Colours (refer to the relative series)

Other front bezel colours can be supplied on request.

We reserve the right to make modifications in the interest of technical progress. All information given herein serves only for product description and is not legally binding.

Misprints and errors do not justify any claims.

This publication, even part of it, may not be reproduced without our prior permission.

Illustrations can deviate.

Internationally protected design.

Degree of Protection (acc. to IEC/EN 60529)

The SCHLEGEL actuators generally comply with IP65 (this refers to the component in front of the switchboard). Special versions, as e.g. for the food processing sector, are classified up to IP69K.

For extremely severe conditions, e.g. coarse dirt, chippings, flour, etc., there are membrane pushbuttons available or actuators with transparent silicone or PVC caps.

Materials

Only top-quality materials such as polyamide 6.6 / polyamide 12 (partially reinforced) and other proven engineering plastics are utilised. Tin-plated brass is mostly used for the terminals of the contact blocks. The contacts are of a silver-nickel alloy but can also be gold-plated on request (gold-plating 5 µm). A special surface makes them self-cleaning.

All products are RoHS compliant.

Technical Characteristics

As to the technical characteristics, approvals and operating and ambient conditions of the contact blocks, please refer to the catalogue information given on the starting pages of the relevant type series.




















The stroke / operating travel is shown in pictograms separately for each actuator and in switching diagrams for the relevant contact blocks. This information is included as well in the technical specifications.

The positive opening function of the NC contacts, which is necessary for emergency-stop applications is identified by a symbol (circle with horizontal arrow) next to the relative switching diagram.

Definition of the IP Codes

Standards & Code Digits	Numerals or Letters	Protection of equipments	Protection of persons
EN 60529		Protection against solid foreign objects (incl. dust)	Protection against access to hazardous parts
First digit	0	non-protected	non-protected
	1	≥ Ø 50 mm	with the back of a hand
	2	≥ Ø 12.5 mm	with a finger
	3	≥ Ø 2.5 mm	with a tool
	4	≥ Ø 1.0 mm	with a wire
	5	dust-protected	with a wire
	6	dust-tight	with a wire
DIN 40050 sect. 9		Protection against ingress of water with harmful effects	
Second digit	0	non-protected	
	1	vertically falling water drops	
	2	water drops (tilted up to 15°)	
	3	spraying water	
	4	splashing water	
	4K	do. with higher pressure	
	5	water jets	
	6	powerful water jets	
	6K	do. with higher pressure	
	7	temporary immersion in water	
	8	continuous immersion in water	
9K	high pressure/steam jet cleaning		

Approvals

Symbol	Name / Organisation	Explication
	CE Kennzeichen, Communautés Européennes	With the CE mark, the manufacturer confirms that the product meets the product-specific requirements of the applicable EC Directives.
	VDE Verband der Elektrotechnik Elektronik Informationstechnik e.V.	The VDE mark indicates conformity with the VDE Standards or European or internationally harmonised standards and confirms conformity with the safety requirements of the applicable directives.
	ENEC European Norms Electrical Certification	European approval mark (applies here to switches for appliances acc. to EN 61058). Replaces the national European Directives of the participating countries. The figure after the ENEC marking refers to the relative national certification authority, e.g. 05=KEMA, 10=VDE.
	KEMA Keuring van Elektrotechnische Materialen te Arnhem	Certification mark of the Dutch approval authority
	Underwriters Laboratories	UL Listed mark, representative samples of the product have been tested by UL and are complying with the US safety requirements.
	Underwriters Laboratories	UL Listed mark, representative samples of the product have been tested by UL and are complying with the US and Canadian safety requirements.
	Underwriters Laboratories	UL Recognized mark, UL marking for approved components that are part of a larger product or system
	Underwriters Laboratories	UL Recognized mark, representative samples of the product have been tested by UL and are complying with the US and Canadian safety requirements.
	Canadian Standards Association	Approval mark of the Canadian certification authority, products bearing this marking have been certified by CSA and are complying with the applicable Canadian Standards.
	Canadian Standards Association	Approval mark of the Canadian certification authority, products bearing this marking have been certified by CSA and are complying with the applicable Canadian and US Standards.
	Demko	Danish approval mark which is registered and provided by UL International Demko A/S. The D mark demonstrates that the certified product complies with the applicable requirements.
	Nemko	Certification mark of the Norwegian approval authority
	Semko	Certification mark of the Swedish approval authority
	Fimko	Certification mark of the Finnish approval authority
	Det Norske Veritas	Certification mark of the Norwegian approval authority Products bearing this mark comply with the ship classification requirements
	Germanischer Lloyd	Certification mark of the German approval authority Products bearing this mark comply with the ship classification requirements
	UkrSEPRO	Certification mark of the Ukrainian approval authority
	Gost-R	Certification mark of the Russian approval authority
	China Compulsory Certificate	Certification mark of the Chinese approval authority CQC

Approvals

Symbol	Name / Organisation	Explication
	TÜV	German approval authority Approval authority for safety-related components such as emergency-off / emergency-stop components
	AS-International Association	Mark for certified AS-Interface components
	Lloyd's Register	Lloyd's Register of Shipping, UK approval authority for ship certification

Mode of Operation of 3-position Selector and Key Switches

One-piece plunger: The one-piece plunger of the 3-position selector and key switches is not pushed in the left position, in the centre position it is pushed half way whereas in the right switching position it is entirely pushed through.

Using a contact block with a NC contact (opens after a travel of approx. 1.5mm) and a NO contact (closes after a travel of approx. 4mm), the switching mode changes as follows:

1. left-hand = switching travel 0mm = NC closed, NO open
2. centre = switching travel ~3mm = NC and NO are open
3. right-hand = switching travel 6 mm = NC open, NO closed

This yields the advantage that it is not important in which „direction“ the contact elements are snapped on, the switching situation always results from the switching travel. This also means that cross coupling of the contact elements is allowed.

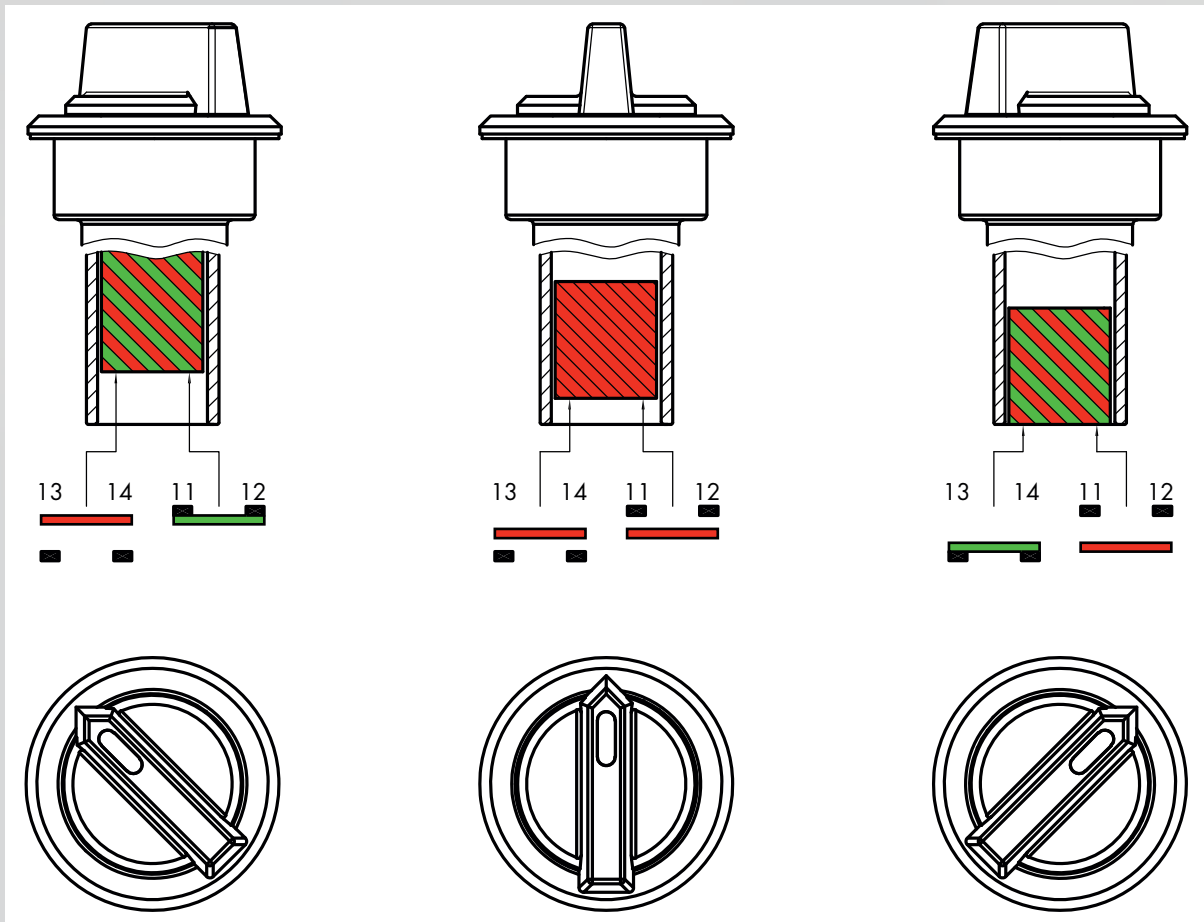


illustration of one-piece plunger

Two-piece plunger: The actuator plunger consists of 2 separate half shells. In the left switching position the left plunger part and therefore the left contact element are operated, in the right switching position it is the right contact element. In the centre position none of the two contact elements is activated. Therefore, it should be noted that a cross-coupling of the contact elements is NOT allowed! In addition, the contact elements must be snapped on correctly, otherwise any actuation will lead to the opposite function.

In order to obtain the same switching situations as mentioned before, two NO contacts must be used:

1. left-hand = left plunger part operated = left NO contact closed, right NO contact open
2. centre = no plunger part operated = both NO contacts open
3. right-hand = right plunger part operated = left NO contact open, right NO contact closed.

The two-piece plunger is used in selector and key actuators of the following series:

Oktron, Oktron-R, Oktron-Juwel, Rontron-R-Juwel, Rontron-RJ-stainless steel, Rontron-Q-Juwel and RX-Juwel (RXJZSSA12E and RXJZWBL).

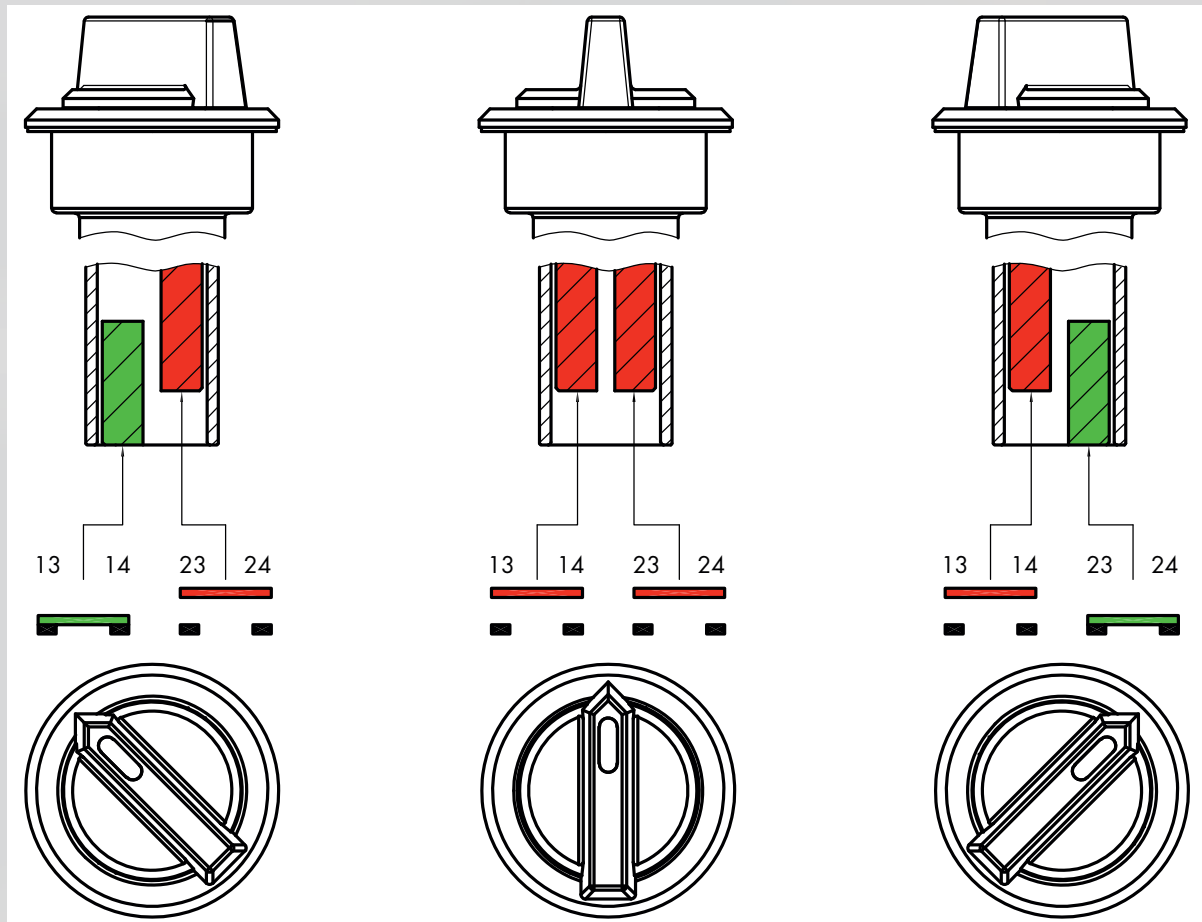


illustration of two-piece plunger